

Non-Contacting Rotary Single Output Hall Effect Sensor

9950 Series

The BEI Duncan 9950 Series offers a non-contacting Hall effect sensor in a rugged design, ideally suited for tight packaging constraints while providing superior reliability and durability. The Hall sensor is rigidly supported to meet the severe durability requirements that are typical in off-highway and agriculture requirements. The new sensor incorporates rotating sintered magnets that enable the sensing element to remain stationary, improving both accuracy and reliability. The high quality Sintered SinCo magnets offer excellent temperature stability and corrosion resistance. One-time factory programmability allows for greater flexibility in designing custom outputs with a short turnaround time.

Fully sealed, (meeting and/or exceeding IP66/IP67 standards) the 9950 is impervious to contamination and moisture. An integrally molded 3-pin connector makes a sealed connection with industry standard Packard Electric connector.

9950 Series Features

Rotating magnet / fixed sensor configuration

Provides improved accuracy and reliability

Fully programmable

Multiple outputs with; offset, gain, slope and temperature compensation are available

Sintered SinCo magnets

Provide excellent temperature stability and corrosion resistance

Ratiometric output

Factory programming through connector

after completion of assembly provides high accuracy

Sealed construction

IP66 / IP67, 3-pin I/O Interface to Packard Weather-Pack Push-to-Seat Series P/N 12015793

Extended temperature range

-40° to +125°C

Return spring (CW standard, CC optional)

Eliminates mechanical backlash

Extended operating life

35 million operational cycles



Ordering Information

9950 XXX XX

Spring Return:

CW = Clockwise

CC = Counter Clockwise

NS = No Spring Return

Electrical Angle:

i.e. 090 = $\pm 45^\circ$, 120 = $\pm 60^\circ$

SAMPLE: 9950 090 CW

Standard +85°C

CW = Clockwise Spring Return

90° ($\pm 45^\circ$) Electrical Angle




170 Technology Drive West
Irvine, CA 92618-2401
(949) 341-9530 Fax: (949) 453-2700
email: sales@beiduncan.com
www.beiduncan.com

ISO9001 & TS16949 Certified

Non-Contacting Rotary Single Output Hall Effect Sensor

9950 Series

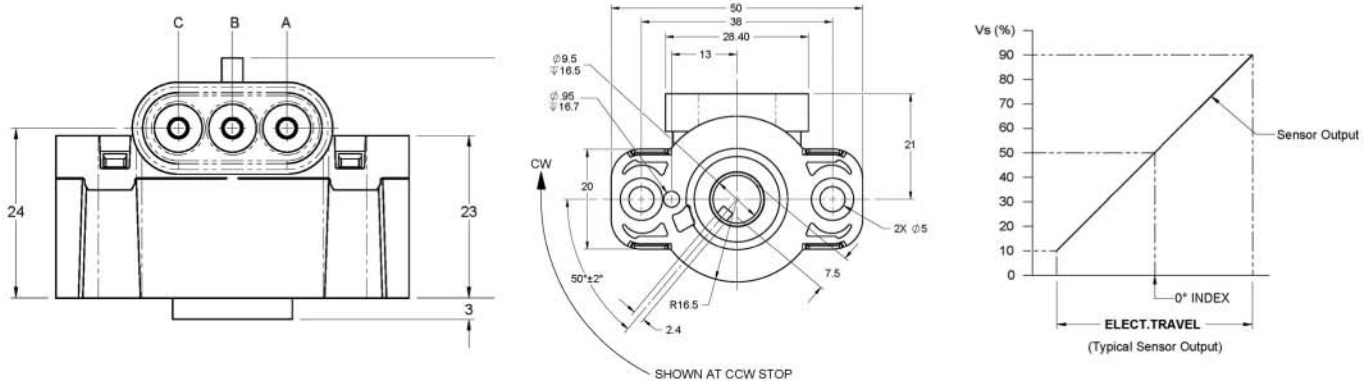

Note: All dimensions are shown in millimeters

Mechanical Specifications

Mechanical travel	-90° to +90° (180° total rotation)
Frequency response	1,000Hz minimum
Rotational torque	0.025 – 0.110 N-m
Weight	35 grams (approx.)

Electrical Specifications

Mechanical input range	-45° to +45° (other angles available)
Input voltage	5.0 V±0.25V DC
Input current	10mA maximum per output 20mA maximum total
Sensor	0.5V – 4.5V (Different output voltage range for sensor outputs available as a custom option)
Accuracy	±2.0% of full scale at room temperature ±3.0% of full scale over operating temperature range
Resolution	Analog (continuous)

CONNECTOR PIN OUTPUT	
	SENSOR
Vs (input)	C
GROUND	A
OUTPUT	B

Environmental Specifications

Electromagnetic compatibility	100V/meter, 14kHz – 1GHz range
Vibration	10G peak, 20 – 2,000 Hz
Shock	50Gs, half sine pulse, 5 m sec duration
Side Load	1kg for 1 million cycles
Operating temperature range	-40°C to +125°C
Storage temperature range	-55°C to +105°C

© Copyright 2007 BEI Duncan Electronics. Specifications subject to change without notice.



170 Technology Drive West
Irvine, CA 92618-2401
(949) 341-9530 Fax: (949) 453-2700
email: sales@beiduncan.com
www.beiduncan.com

ISO9001 & TS16949 Certified